

A

B

C

D

E

RoHS

HOUSING

Part No: KJ-3962H

Material: Nylon 66 UL94V-0




Circuits:2-20circuits available

Insulation resistance: 1000M Ω

Withstand Voltage: 1000V AC/minute

Current rating: 7A AC/DC

Voltage rating: 250V AC/DC

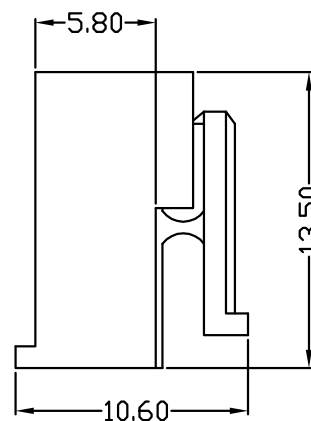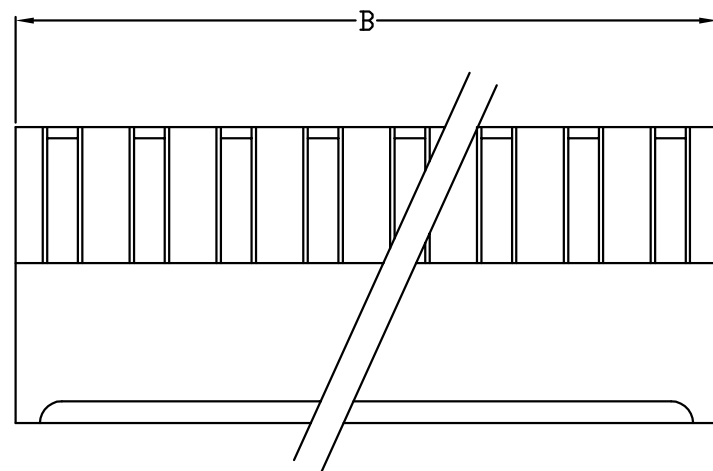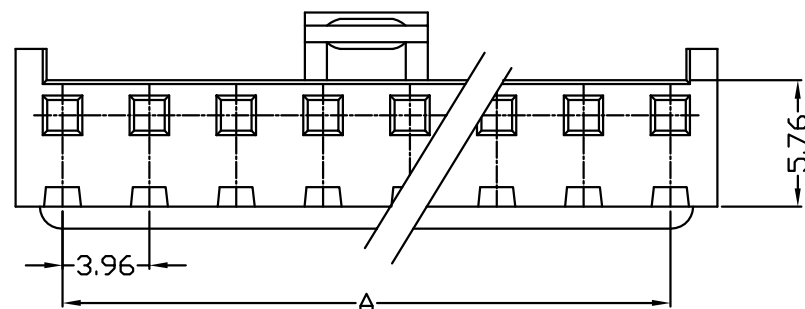

Dimensions

circuits	A	B
2	3.96	8.22
3	7.92	12.18
4	11.88	16.14
5	15.84	20.10
6	19.80	24.06
7	23.76	28.02
8	27.72	31.98
9	31.68	35.94
10	35.64	39.90
11	39.60	43.86
12	43.56	47.82
13	47.52	51.78
14	51.48	55.74
15	55.44	59.70
16	59.40	63.66
17	63.36	67.62
18	67.32	71.58
19	71.28	75.54
20	75.24	79.50

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖

DRAWING:

吳華雄

比例 (SCALE):

3:1

DESCRIPTION:

VH3.96 HSG

ANGLE
 $\pm 2^\circ$ DIM:
.X ± 0.5
.XX ± 0.25
.XXX ± 0.10 審核
CHECKED BY

凌輝

存檔名稱 (FILE):

KJ-3962H

PART NO:

KJ-3962H

REV:A0

核准
APPROVAL BY

苗德蕙

PROJECTION:

