

A

B

C

D

E

RoHS

WAFER(180°)

Part No: KJ-2504WV

Material: pin: Brass tin-plated

Base: Nylon 66 UL94V-0

Circuits: 2-15circuits available

Insulation Resistance: 1000M Ω min

Withstand Voltage: 1000V AC/minute

Current Rating: 3A AC/DC

Voltage Rating: 250V AC/DC

ORDERING INFORMATION:

KJ-2504WV*-P-*-* (*)

Part No

:W/O Post

P:W/Post

Circuit No




Special Material:PA46
6T

Color

:Standard type w/Kink
RK:Reversed Kink
NK:None Kink:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

Dimensions

circuit	A	B
2	2.50	7.5
3	5.00	10.0
4	7.50	12.5
5	10.00	15.0
6	12.50	17.5
7	15.00	20.0
8	17.50	22.5
9	20.00	25.0
10	22.50	27.5
11	25.00	30.0
12	27.50	32.5
13	30.00	35.0
14	32.50	37.5
15	35.00	40.0

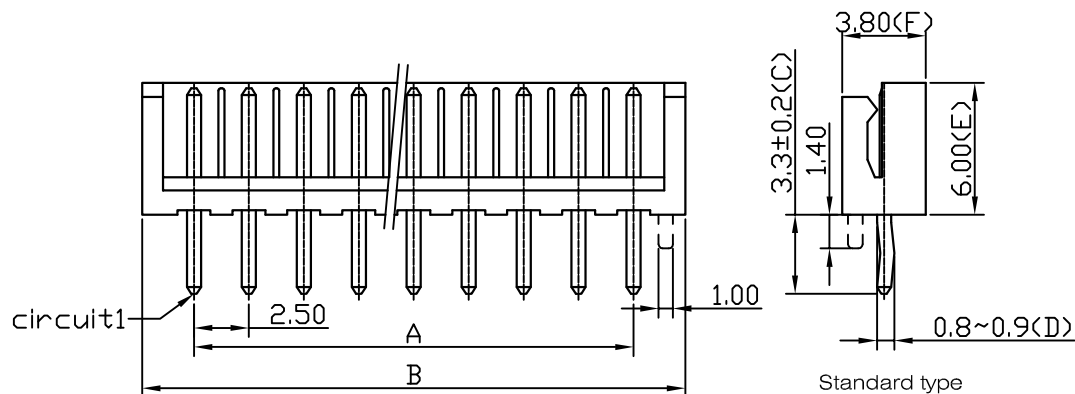

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

吳華雄

比例 (SCALE):

3:1

DESCRIPTION:

EH2.5 WAFER 180°

ANGLE
±2°DIM:
.X±0.50
.XX±0.25
.XXX±0.10審核
CHECKED BY

凌輝

存檔名稱 (FILE):

KJ-2504WV

日期 (DATE):

2007/05/10

PART NO:

KJ-2504WV

REV:A1

核准
APPROVAL BY

苗德蕙

PROJECTION:

