



HOUSING


Part No:KJ-3001HF-1
Material: Nylon66 UL94-V2 Black
Circuits:2-12circuits available
Current Rating:5A AC,DC
Voltage Rating:250V AC/DC
Insulation Resistance:1000MΩ Min
Withstanding Voltage:1500V AC/minule

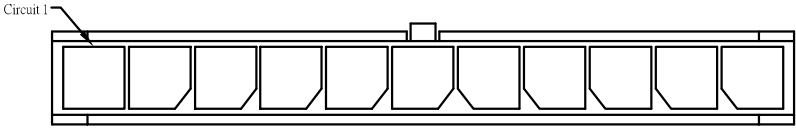


11P

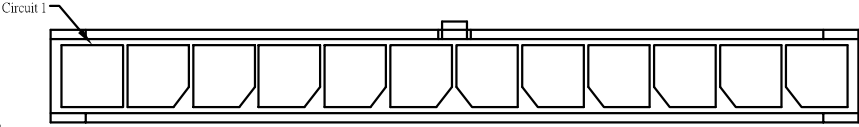


12P

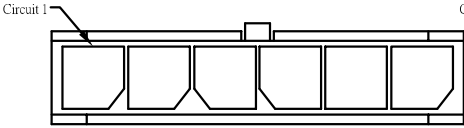



6P

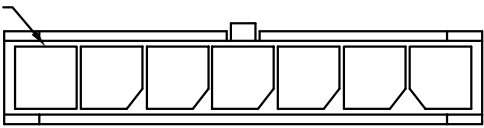


7P

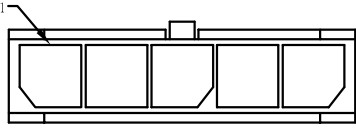


5P

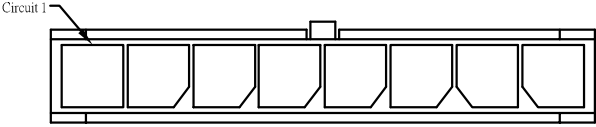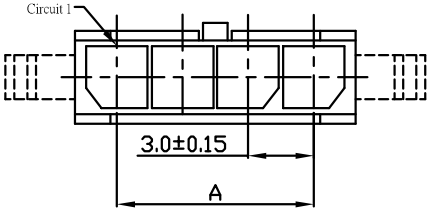


8P




4P

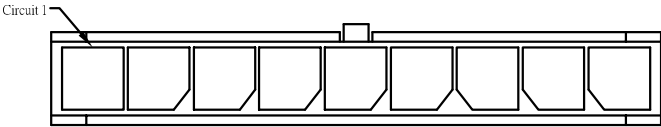


9P




3P

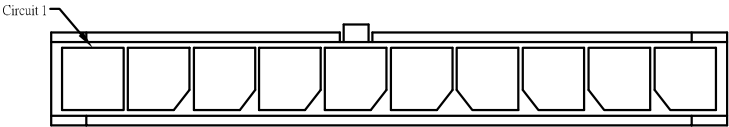

10P



2P

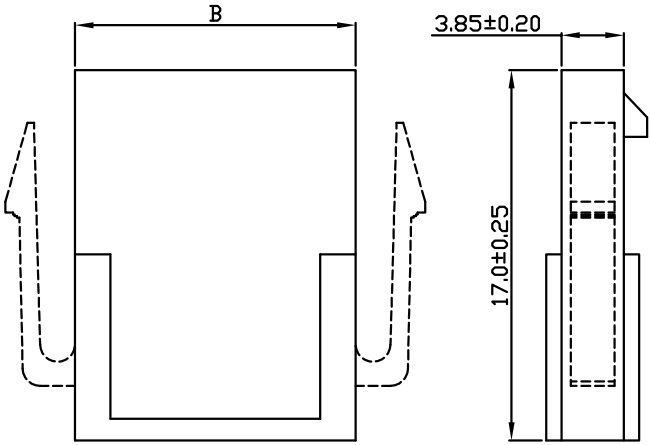

ORDERING INFORMATION: RoHS

KJ-3001HF*-1*P-(*)

Part No

:With Ear

N:Without Ear

1 : Single Row

Circuit No

Special Material:V-0

Dimensions

circuit	A	B
1*2	3.00	6.85
1*3	6.00	9.85
1*4	9.00	12.85
1*5	12.00	15.85
1*6	15.00	18.85
1*7	18.00	21.85
1*8	21.00	24.85
1*9	24.00	27.85
1*10	27.00	30.85
1*11	30.00	33.85
1*12	33.00	36.85

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖

DRAWING:

王三星

比例 (SCALE):

2:1

名稱 (TITLE):

MX3.0 HF


存檔名稱 (FILE):

KJ-3001HF-1

日期 (DATE):

2009/05/21

PROJECTION:



DESCRIPTION:

MX3.0 MICRO-FIT FEMALE HOUSING SINGLE ROW

PART NO:

KJ-3001HF-1

ANGLE
±2°

DIM:
.X±0.50
.XX±0.25
.XXX±0.10

REV:A0

審核

CHECKED BY

凌輝

核准

APPROVAL BY

苗德蕙

PROJECTION: