

## HOUSING

Part No:KJ-3001HF-2

Material:Nylon 66 UL94-V2 Black

Circuits:2-24



Insulation Resistance:1000M $\Omega$  min

Withstand Voltage:1500V AC/minute

Current Rating:5A AC,DC

Voltage Rating:250V AC,DC

Temperature Range:-25 $^{\circ}$ C ~ +85 $^{\circ}$ C

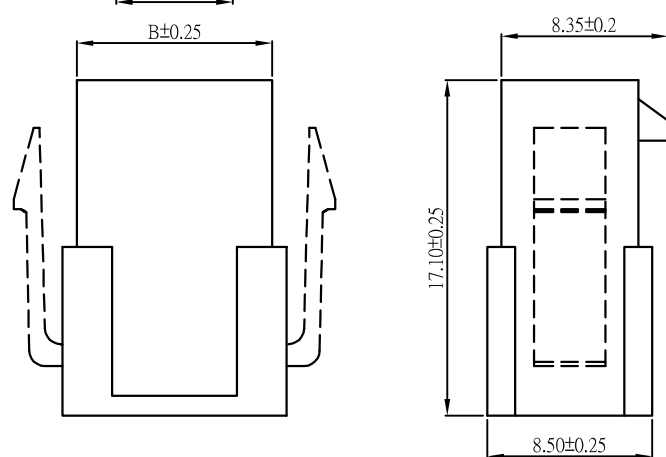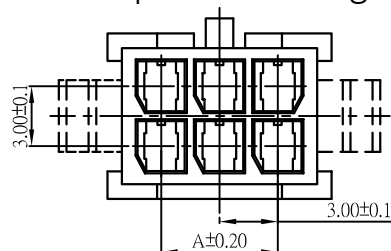

## ORDERING INFORMATION:

KJ-3001HF\*-2\*P-\* (\*)

Part No

:With Ear

N:Without Ear


2: Double Row

Circuit No

Special material:V0

Color

RoHS

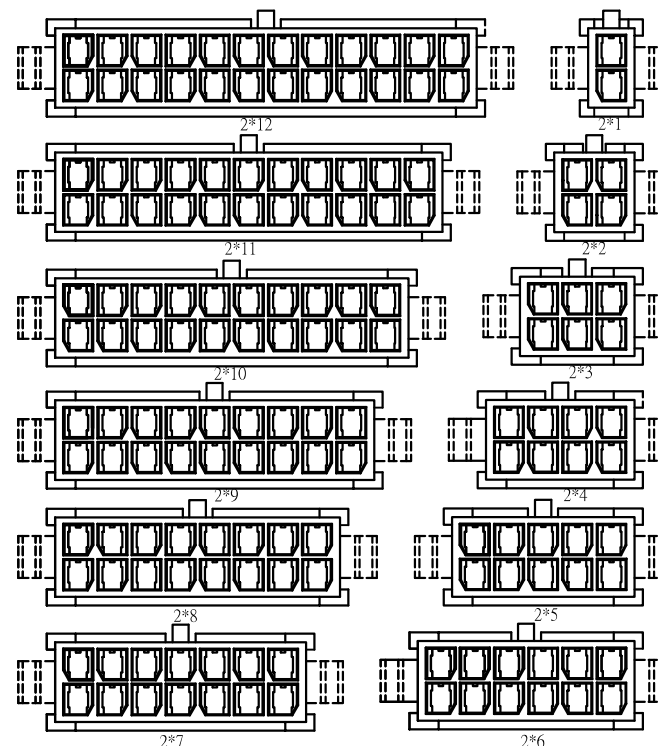

## Dimensions

| circuit | A     | B     |
|---------|-------|-------|
| 2*1     | —     | 3.85  |
| 2*2     | 3.00  | 6.85  |
| 2*3     | 6.00  | 9.85  |
| 2*4     | 9.00  | 12.85 |
| 2*5     | 12.00 | 15.85 |
| 2*6     | 15.00 | 18.85 |
| 2*7     | 18.00 | 21.85 |
| 2*8     | 21.00 | 24.85 |
| 2*9     | 24.00 | 27.85 |
| 2*10    | 27.00 | 30.85 |
| 2*11    | 30.00 | 33.85 |
| 2*12    | 33.00 | 36.85 |

**KJ** 東莞嘉英電子厂  
JIA YING ELECTRONICS

UNIT:MM

繪圖  
DRAWING:

黃玲麗

比例 (SCALE):

2:1

名稱 (TITLE):

MX3.0 HF


存檔名稱 (FILE):

KJ-3001HF-2

日期 (DATE):

2010/01/18

PROJECTION:



DESCRIPTION:

MX3.0 MICRO-FIT FEMALE HOUSING

PART NO:

KJ-3001HF-2

ANGLE  
 $\pm$ 2 $^{\circ}$

DIM:  
.X $\pm$ 0.50  
.XX $\pm$ 0.25  
.XXX $\pm$ 0.10

REV:A2

審核  
CHECKED BY

凌輝

核准  
APPROVAL BY

苗德蕙