

A

B

C

D

E

RoHS

ORDERING INFORMATION:
KJ-3001WR(A)-2*^{*}P-^{*}

Part No

2 : Double Row

Circuit No

:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

WAFER(90°)

Part No:KJ-3001WR(A)-2

Material: Pin:Brass Tin-Plated

Base:PBT+30%G/F,UL94-V0

Circuits:2-24circuits available

Insulation Resistance:1000MΩ Min


Withstanding Voltage:1500V AC/minute

Current Rating:5A AC,DC

Voltage Rating:250V AC,DC

Dimensions

circuit	A	B	C	circuit	A	B	C
2*1	- -	6.65	- -	2*7	18.00	24.65	13.70
2*2	3.00	9.65	- -	2*8	21.00	27.65	16.70
2*3	6.00	12.65	- -	2*9	24.00	30.65	19.70
2*4	9.00	15.65	4.70	2*10	27.00	33.65	22.70
2*5	12.00	18.65	7.70	2*11	30.00	36.65	25.70
2*6	15.00	21.65	10.70	2*12	33.00	39.65	28.70

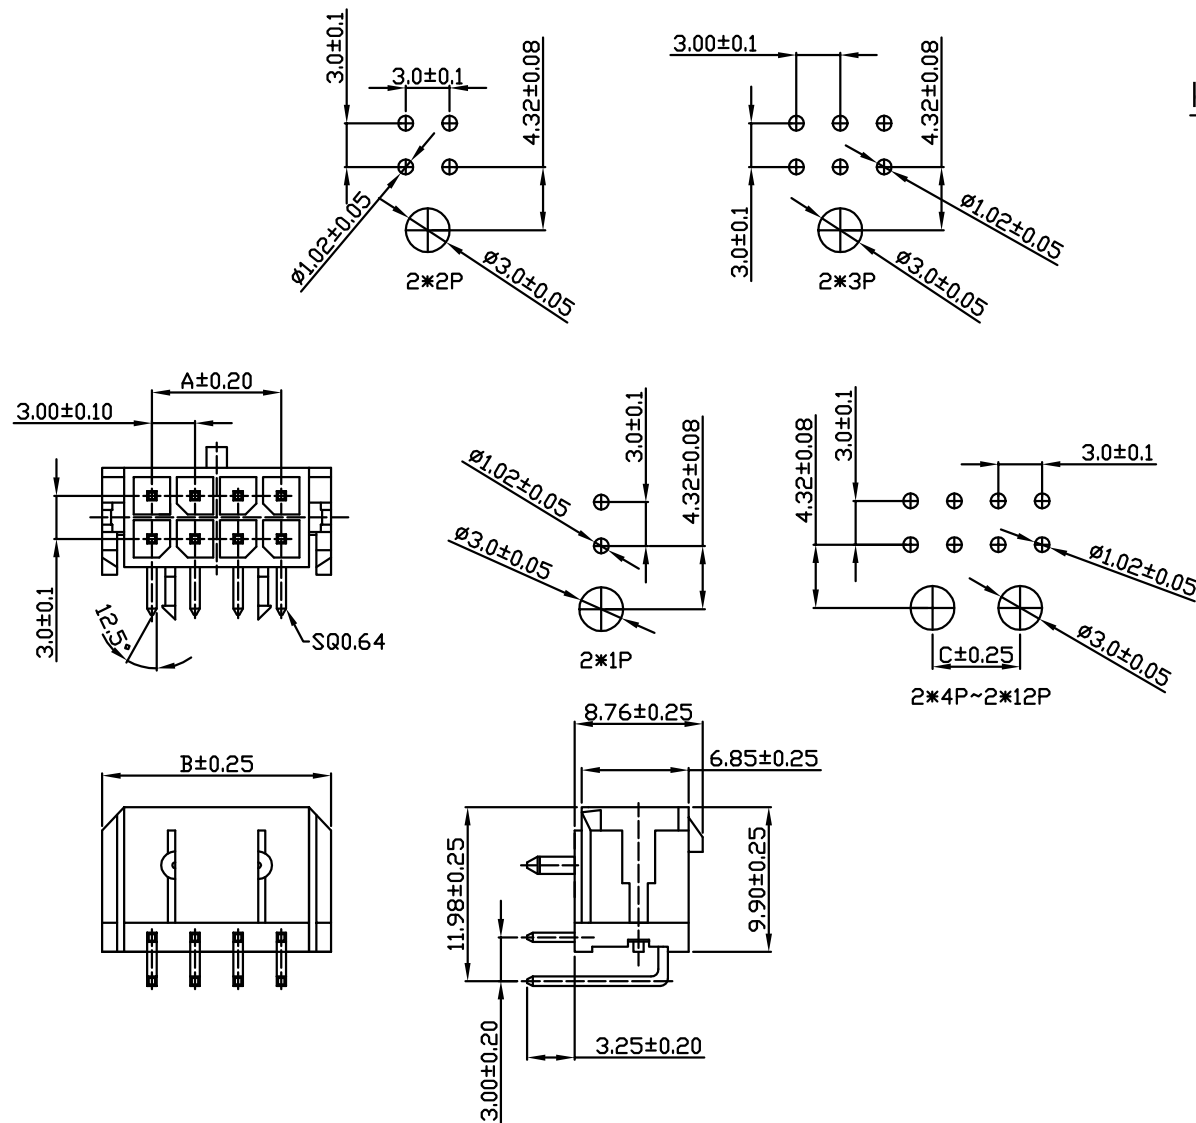

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

王三星

比例 (SCALE):

2:1

DESCRIPTION:

MX3.0 MICRO-FIT WAFER 90°

ANGLE
±2°DIM:
.X±0.50
.XX±0.25
.XXX±0.10審核
CHECKED BY

凌輝

核准
APPROVAL BY

苗德蕙

名稱 (TITLE):

MX3.0 90°

存檔名稱 (FILE):

KJ-3001WR(A)-2

日期 (DATE):

2009/06/18

PROJECTION:

