

WAFER(90

Part No:KJ-4260WR(B)-2

Material:pin:Brass Tin-Plated

Base:Nylon66 UL94-V2


Circuits:2-24circuits available

Insulation Resistance:1000M Ω min

Withstand Voltage:1500V AC/minute

Current Rating:9A AC/DC

Voltage Rating:600V AC/DC

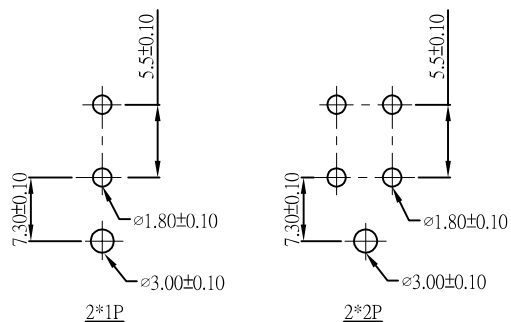

P.C.B. LAYOUT

ORDERING INFORMATION:

KJ-4260WR(B)-2 $\times$ *P-*-* (*)

Part No

2 : Double Row





Circuit No

Special Material:PA46
6T
V-0


Color

:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

RoHS

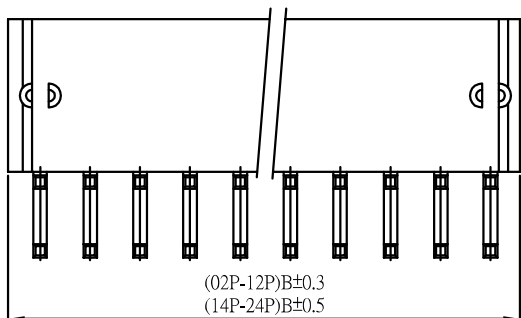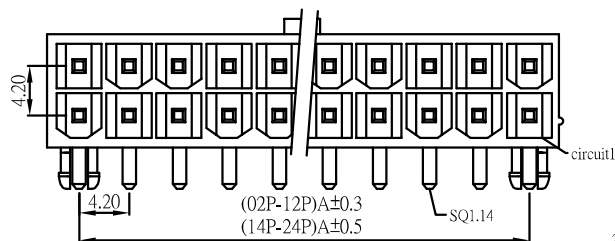

2*2P

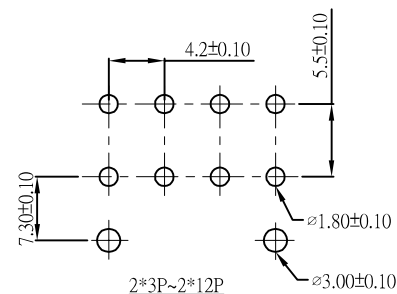

P.C.B. LAYOUT

Dimensions

circuit	A	B	circuit	A	B
2*1	—	—	2*7	25.20	30.60
2*2	4.20	9.60	2*8	29.40	34.80
2*3	8.40	13.80	2*9	33.60	39.00
2*4	12.60	18.00	2*10	37.80	43.20
2*5	16.80	22.20	2*11	42.00	47.40
2*6	21.00	26.40	2*12	46.20	51.60

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

王三星

比例 (SCALE):

3:1

DESCRIPTION:

MX4.2 MINI-FIT(實心PIN)

ANGLE
 $\pm 2^{\circ}$

DIM:
.X ± 0.50
.XX ± 0.25
.XXX ± 0.10

審核
CHECKED BY

凌輝

名稱 (TITLE):

MX4.2實心PIN

存檔名稱 (FILE):

KJ-4260WR(B)-2

日期 (DATE):

2009/11/30

PART NO:

KJ-4260WR(B)-2

REV:A3

核准
APPROVAL BY

苗德蕙

PROJECTION:

