


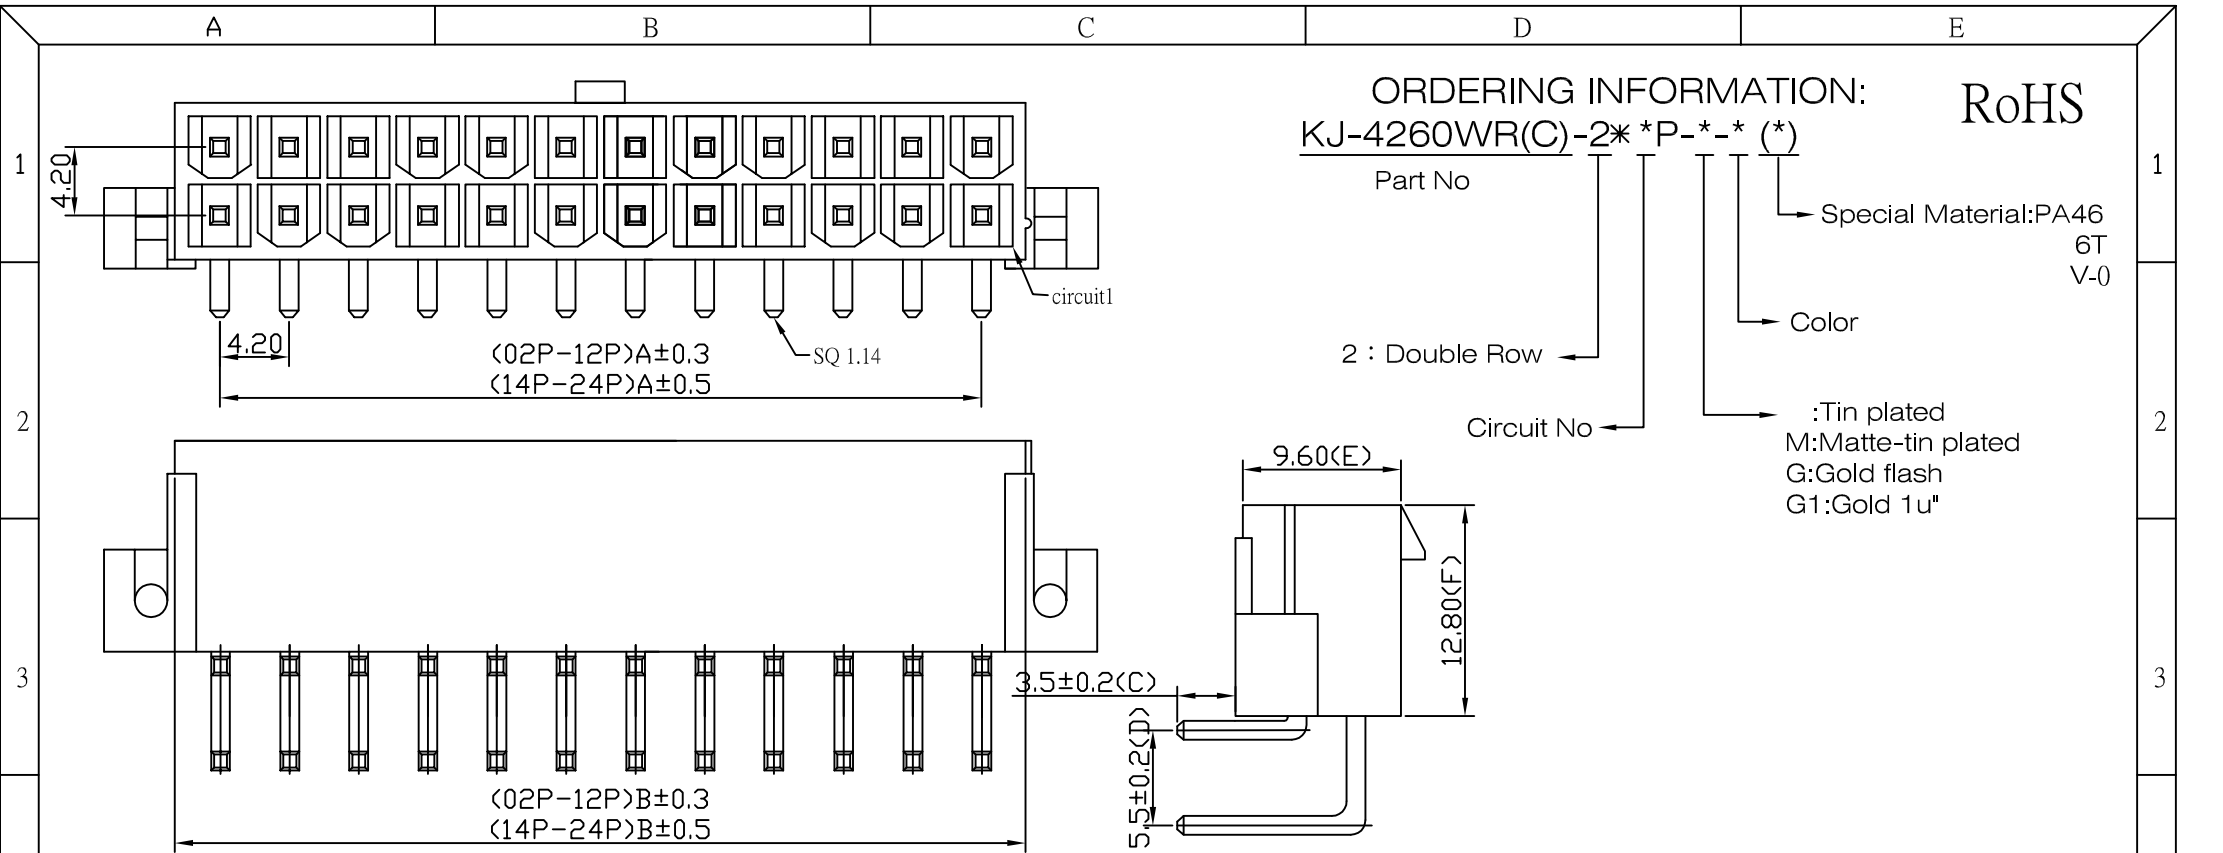

ORDERING INFORMATION:
KJ-4260WR(C)-2* *P-*-* (*)

Part No

2 : Double Row

Circuit No

RoHS


Special Material:PA46
6T
V-0

Color

:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

WAFER(90°)

Part No: KJ-4260WR(C)-2
Material: pin: Brass tin-plated
Base: Nylon66 UL94V-2
Circuits: 2-24circuits available
Insulation resistance: 1000M Ω min
Withstand Voltage: 1500V AC/minute
Current Rating: 9A AC/DC
Voltage Rating: 600V AC/DC

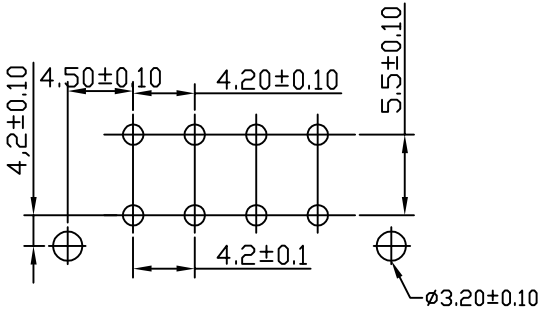

P.C.B. LAYOUT

Dimensions

circuit	A	B	circuit	A	B
2*1	- -	5.40	2*7	25.20	30.60
2*2	4.20	9.60	2*8	29.40	34.80
2*3	8.40	13.80	2*9	33.60	39.00
2*4	12.60	18.00	2*10	37.80	43.20
2*5	16.80	22.20	2*11	42.00	47.40
2*6	21.00	26.40	2*12	46.20	51.60

6	KJ 東莞嘉英電子厂 JIA YING ELECTRONICS		UNIT:MM		繪圖 DRAWING:	吳華雄	比例 (SCALE):	3:1	6
	DESCRIPTION: MX4.2 MINI-FIT(實心PIN)		ANGLE ±2°	DIM: .X±0.50 .XX±0.25 .XXX±0.10	審核 CHECKED BY	凌輝	名稱 (TITLE):	MX4.2實心PIN	
					核准 APPROVAL BY	苗德蕙	存檔名稱 (FILE):	KJ-4260WR(C)-2	
	PART NO:		REV:A1		日期 (DATE):	2007/05/24			
					PROJECTION:				