

WAFER(180°)

Part No: KJ-4259WV(A)-2

Material: Pin: Brass Tin-Plated

Base: Nylon66 UL94-V2

Circuits: 2-24circuits available

Insulation Resistance:1000M Ω min

Withstand Voltage:1500V AC/minute

Current Rating:9A AC/DC

Voltage Rating:600V AC/DC

ORDERING INFORMATION:

KJ-4259WV(A)-2**P--*-* (*)

Part No

2 : Double Row

Circuit No

Special Material:PA46

6T

V-0

Color





:Tin plated

M:Matte-tin plated

G:Gold flash

G1:Gold 1u"

RoHS

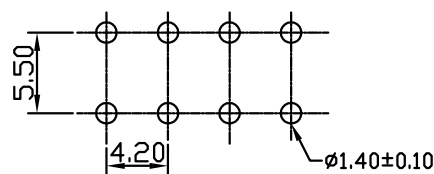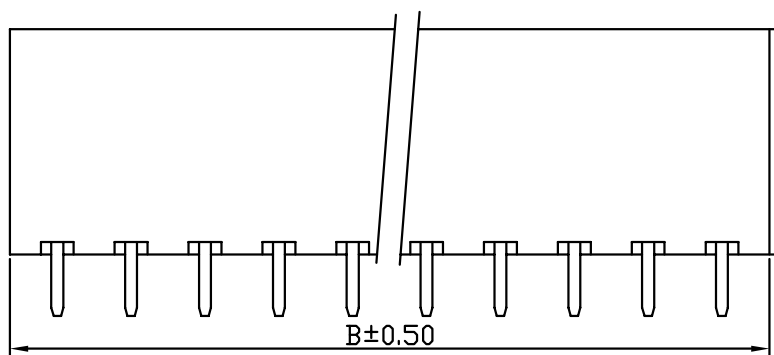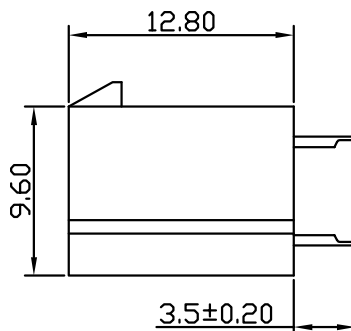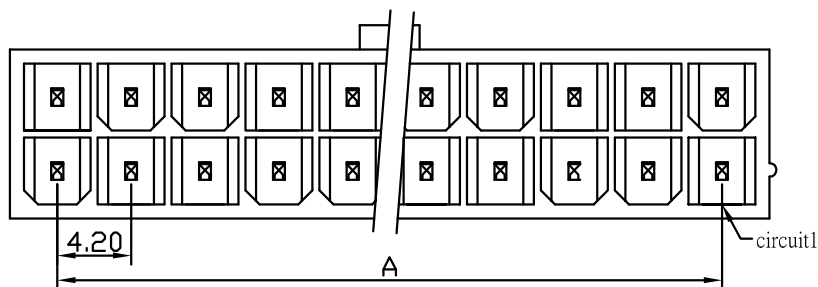

P.C.B. LAYOUT

Dimensions

circuit	A	B	circuit	A	B
2*1	-	5.4	2*7	25.20	30.6
2*2	4.20	9.6	2*8	29.40	34.8
2*3	8.40	13.8	2*9	33.60	39.0
2*4	12.60	18.0	2*10	37.80	43.2
2*5	16.80	22.2	2*11	42.00	47.4
2*6	21.00	26.4	2*12	46.20	51.6

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖

DRAWING:

王三星

比例 (SCALE):

3:1

名稱 (TITLE):

MX4.2空心PIN


存檔名稱 (FILE):

KJ-4259WV(A)-2

日期 (DATE):

2008/06/27

PROJECTION:



DESCRIPTION:

MX4.2 MINI-FIT(空心PIN)

ANGLE
±2°

DIM:
.X±0.50
.XX±0.25
.XXX±0.10

審核
CHECKED BY

凌輝

核准
APPROVAL BY

苗德蕙

PART NO:

KJ-4259WV(A)-2

REV:A2