

WAFER(180°)

Part No: KJ-1251WV

Material: pin: Brass tin-plated

Base: Nylon 46 UL94V-0

Circuits: 2-15circuits available

Insulation Resistance: 100M Ω min

Withstand Voltage: 500V AC/minute

Current Rating: 1A AC/DC

Voltage Rating: 125V AC/DC

RoHS

ORDERING INFORMATION:

KJ-1251WV-*P-*-* (*)





Part No

Circuit No

Special Material:PA6T

Color

:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

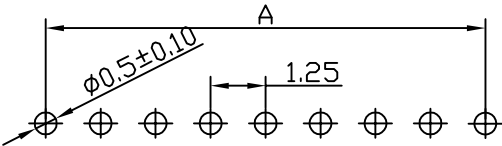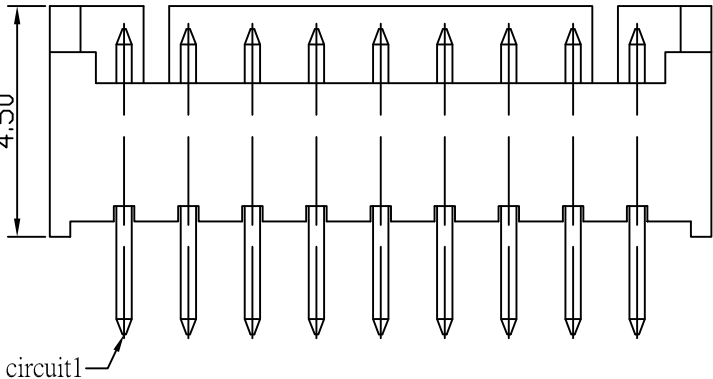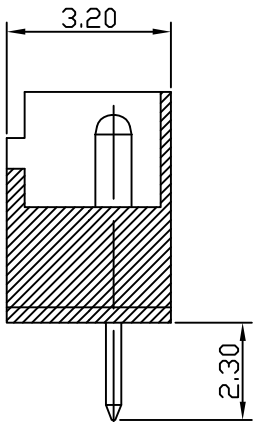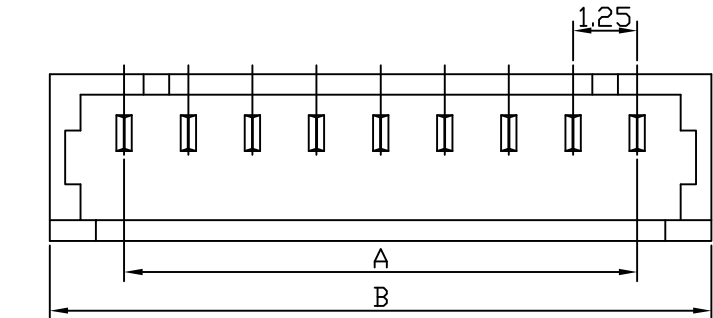

P.C.B. LAYOUT

circuit	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

王三星

比例 (SCALE):

7:1

名稱 (TITLE):

MX1.25 180°


存檔名稱 (FILE):

KJ-1251WV

日期 (DATE):

2007/10/10

PROJECTION:



DESCRIPTION:

MX1.25 WAFER 180° DIP

PART NO:

KJ-1251WV

ANGLE
±2°

DIM:
.X±0.50
.XX±0.25
.XXX±0.10

REV:A0

審核
CHECKED BY

凌輝

核准
APPROVAL BY

苗德蕙