

A

B

C

D

E

RoHS

WAFER(180°)

Part No:KJ-1251WVS

Material:pin:Brass tin-plated

Base: Nylon6T UL94-V0

Circuits:2-15circuits available



Insulation Resistance:500M Ω min

Withstand Voltage: 500V AC/minute

Current Rating: 1A AC/DC



Voltage Rating: 100V AC/DC

Temperature Range:-25°C~+85°C

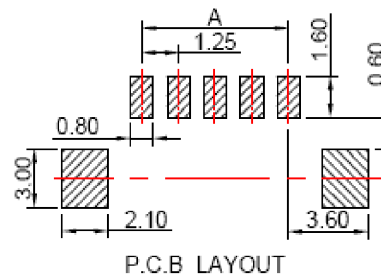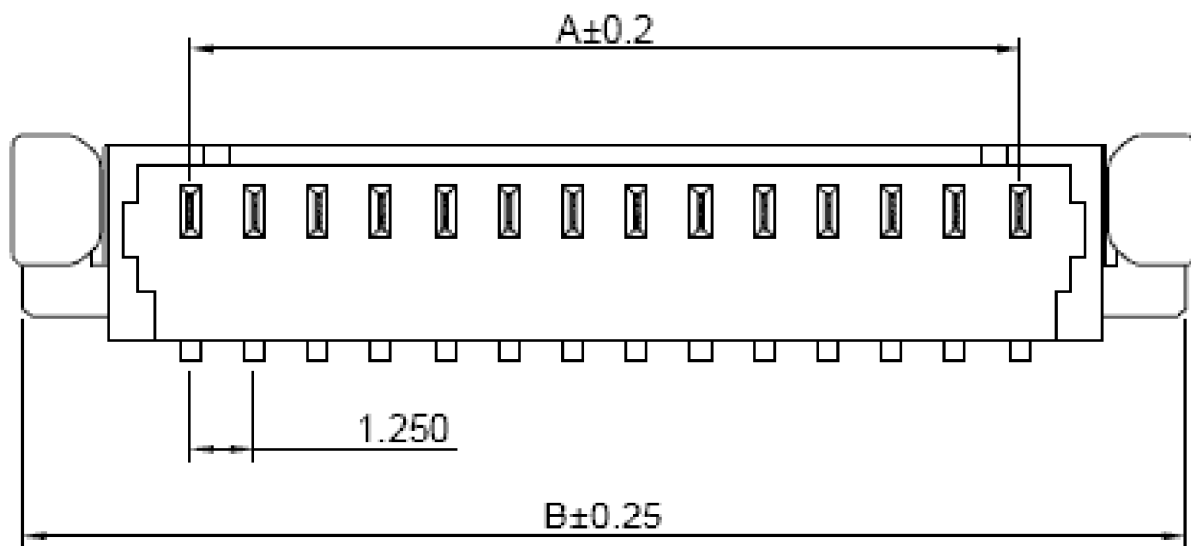

Dimensions

circuit	A	B
2P	1.25	7.35
3P	2.50	8.60
4P	3.75	9.85
5P	5.00	11.10
6P	6.25	12.35
7P	7.50	13.60
8P	8.75	14.85
9P	10.00	16.10
10P	11.25	17.35
11P	12.50	18.60
12P	13.75	19.85
13P	15.00	21.10
14P	16.25	22.35
15P	17.50	23.60

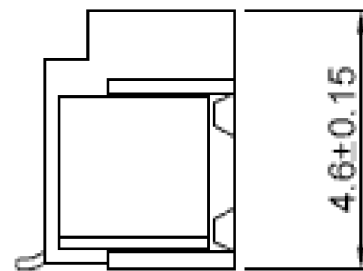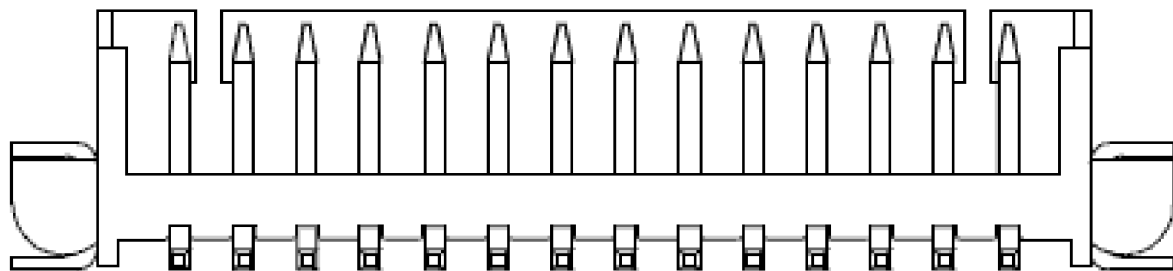**KJ**

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

王三星

比例 (SCALE):

6:1

DESCRIPTION:

MX1.25 SMT 180°

ANGLE
±2°DIM:
.X±0.50
.XX±0.25
.XXX±0.10審核
CHECKED BY

凌輝

名稱 (TITLE):

MX1.25 SMT 180°

存檔名稱 (FILE):

KJ-1251WVS

日期 (DATE):

2009/06/11

PART NO:

KJ-1251WVS

REV:A0

核准
APPROVAL BY

苗德蕙

PROJECTION:

