

A

B

C

D

E

RoHS

WAFER(90°)

Part No: KJ-1251WRS

Material: pin: Bress Tin-Plated

Base: Nylon 46 UL94-V0



Circuits: 2-15circuits available

Insulation Resistance: 500MΩ min




Withstand Voltage: 500V AC/minute

Current Rating: 1A AC/DC

Voltage Rating: 100V AC/DC

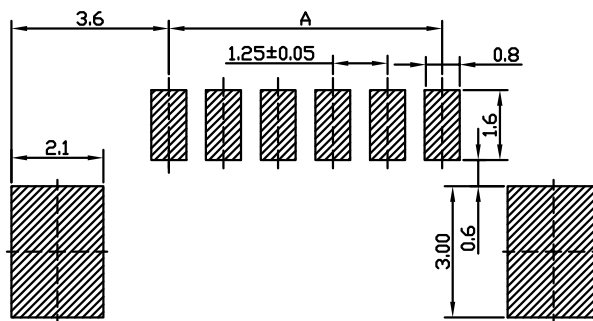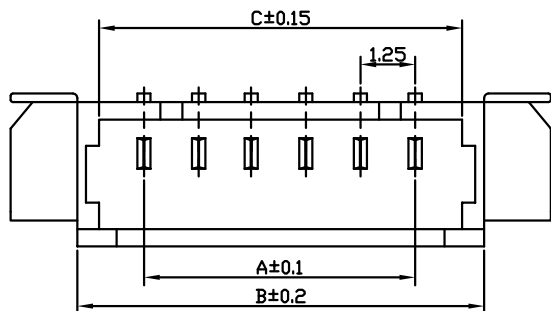

RECOMMENDED P.C.BOARD HOLE DIMM

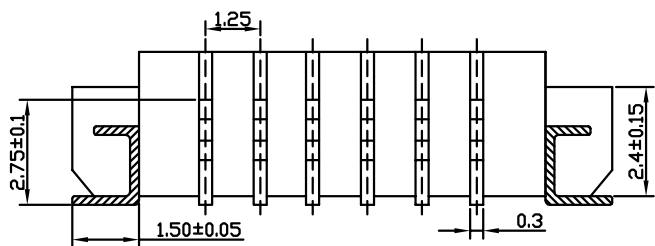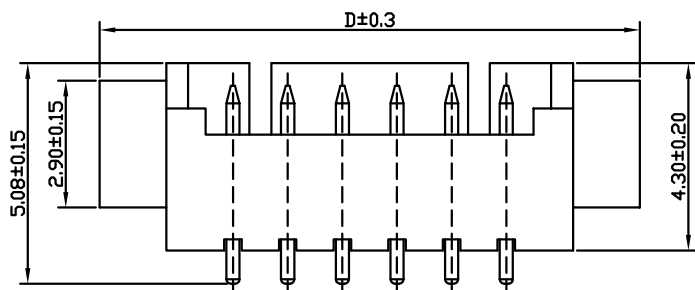

circuit	A	B	C	D
2P	1.25	4.25	3.05	7.25
3P	2.50	5.50	4.30	8.50
4P	3.75	6.75	5.55	9.75
5P	5.00	8.00	6.80	11.00
6P	6.25	9.25	8.05	12.25
7P	7.50	10.50	9.30	13.50
8P	8.75	11.75	10.55	14.75
9P	10.00	13.00	11.80	16.00
10P	11.25	14.25	13.05	17.25
11P	12.50	15.50	14.30	18.50
12P	13.75	16.75	15.55	19.75
13P	15.00	18.00	16.80	21.00
14P	16.25	19.25	18.05	22.25
15P	17.50	20.50	19.30	23.50

KJ

東莞嘉英電子厂

JIA YING ELECTRONICS

UNIT:MM

繪圖

DRAWING:

王三星

比例 (SCALE):

7:1

DESCRIPTION:

MX1.25 WAFER 90° SMT

ANGLE
±2°DIM:
.X±0.50
.XX±0.25
.XXX±0.10

審核

CHECKED BY

凌輝

核准

APPROVAL BY

苗德蕙

名稱 (TITLE):

MX1.25 WAFER 90° SMT

存檔名稱 (FILE):

KJ-1251WRS

日期 (DATE):

2008/01/08

PROJECTION:

